# INDUSTRIAL SAFETY GUARDRAIL





## Protecting People and Property




## HERWIN SAFETY HERWIN SAFETY, INC. 1-800-868-5438 • 724-446-2000 • FAX: 724-446-0988

sales@herwin.biz www.herwin.biz





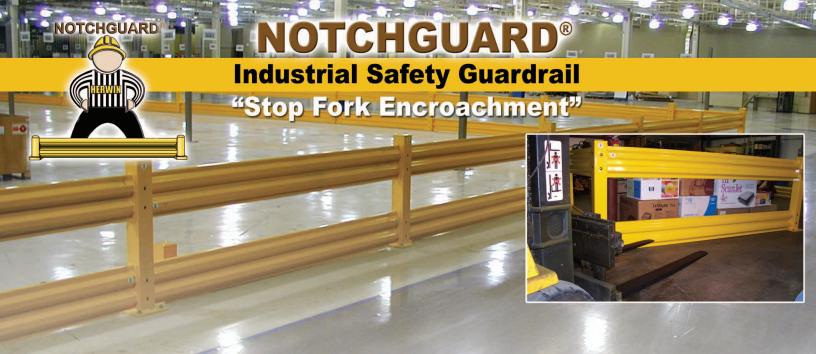

Stop fork encroachment with **NOTCHGUARD**<sup>®</sup> industrial guardrail. This unique industrial safety rail helps prevent accidental damage to products, controls and materials stored in defined storage and holding areas.

Standard industrial guardrail is designed like road guide rail. The road safety rail is spaced at bumper and fender height to accommodate cars and trucks. **NOTCHGUARD**<sup>®</sup> bottom rail is installed to prevent the forks attached to a lift truck from protruding through the rail and causing product damage. Standard forklift industry safety guidelines say the forklift operator should travel with the forks in the lowest possible position. Operators conforming to these guidelines travel with the forks 6" to 8" off the ground. **NOTCHGUARD**<sup>®</sup> barriers help prevent these forks from encroaching product stored on the other side of the rail. **NOTCHGUARD**<sup>®</sup> safety rail is easy to install with common tools such as wrenches, sockets and hammer drill. All standard fasteners are included, even the floor anchors and simple installation instructions are included with each order. **NOTCHGUARD**<sup>®</sup> uses the sturdiest posts in the industry. Each post is manufactured from 5" x 5" square tubular metal welded to a 10" x 10" baseplate. Each rail is designed to assure structural stiffness to meet the 10,000 lb. at 4 mph breakthrough rating when installed at proper concrete depth.

All rails and posts have a safety yellow powder coat finish.

### AVAILABLE SIZES OF

NUICIGUAN	GUARDRAIL
<u>Model #</u>	<u>Size</u>
NG-10R	10 ft. Rail
NG-9R	9 ft. Rail
NG-8R	8 ft. Rail
NG-7R	7 ft. Rail
NG-6R	6 ft. Rail
NG-5R	5 ft. Rail
NG-4R	4 ft. Rail
NG-3R	3 ft. Rail
NG-2R	2 ft. Rail

Nominal rail length dimension is from center of post to center of post.

#### AVAILABLE SIZES AND CONFIGURATIONS OF NOTCHGUARD® POSTS

<u>Model #</u> GS-SRP	<u>Size/Description</u> 5" x 5" Single Post, 18" high, 12" rail height	
GS-DRP	5" x 5" Double Post, 44" high, 42" rail height	•
GS-LOB	Lift out brackets (Pair)	

All rails and posts have a safety yellow powder coat finish.



www.notchguard.com

Download a worksheet from our website and our staff will assist you in the layout of your application.

GL GL	<b>ICHGUARD®</b> Jardrail Drksheet	FAX	"Quick freight of TO: 72	charge 4-446-0	988
Contact Name				bla Rail (D high, 42" to	
Company Address				ple Rail (S) high , 12" to	
				n-Out ackets (U)	
rail or "U" for Lift-Out brack	below. Beside each rail, note o et. Layout will be calculated w n one business day with job an 0-858-5438.	ith standard rail I	engths of 2,3	3, 4, 5, 6, 7,	8, 9, or 10
rail or "U" for Lift-Out brack feet. We will respond within	et. Layout will be calculated w in one business day with job an	ith standard rail I	engths of 2,3	3, 4, 5, 6, 7,	8, 9, or 10
rail or "U" for Lift-Out brack feet. We will respond within	et. Layout will be calculated w in one business day with job an	ith standard rail I	engths of 2,3	3, 4, 5, 6, 7,	8, 9, or 10
rail or "U" for Lift-Out brack feet. We will respond within	et. Layout will be calculated w in one business day with job an	ith standard rail I	engths of 2,3	3, 4, 5, 6, 7,	8, 9, or 10
rail or "U" for Lift-Out brack feet. We will respond within	et. Layout will be calculated w in one business day with job an	ith standard rail I	engths of 2,3	3, 4, 5, 6, 7,	8, 9, or 10
rail or "U" for Lift-Out brack feet. We will respond within	et. Layout will be calculated w in one business day with job an	ith standard rail I	engths of 2,3	3, 4, 5, 6, 7,	8, 9, or 10
rail or "U" for Lift-Out brack feet. We will respond within	et. Layout will be calculated w in one business day with job an	ith standard rail I	engths of 2,3	3, 4, 5, 6, 7,	8, 9, or 10
rail or "U" for Lift-Out brack feet. We will respond within	et. Layout will be calculated w in one business day with job an		engths of 2,3	3, 4, 5, 6, 7,	8, 9, or 10

OFFSET BASEPLATE

CENTERED BASEPLATE

ORNER OFFSET BASEPLATE

2021 Herwin Safety, Inc. All rights reserved. Specifications subject to change.

## DSM Industrial Safety Guardrail



GUARDSMITH

HERWIN

Also available:

**DISPLAYGUARD®** electronic industrial safety display combines a protective steel guardrail with a highly visible computer-directed electronic display that can be read from 200 feet.

- 5

**GUARDSMITH**<sup>®</sup> industrial guardrail is designed to withstand 10,000 lb. force at a 4 mph breakthrough rating when installed at the proper concrete depth.

**GUARDSMITH**<sup>®</sup> guardrail uses external mounting fasteners that pass completely through the 5"x 5" post and rail bracket to assure maximum structural strength and integrity.

**GUARDSMITH**<sup>®</sup> guardrail is easy to install with common tools. All standard fasteners and floor anchors are included with each order.

**GUARDSMITH®** can tailor fit your application with single or double guardrail as well as post protectors and bollards.

AVAILABLE SIZES OF				
GUARDSMITH® GUARDRAIL				
Model #	<u>Size</u>			
GS-10R	10 ft. Rail			
GS-9R	9 ft. Rail			
GS-8R	8 ft. Rail			
GS-7R	7 ft. Rail	All		
GS-6R	6 ft. Rail	All		
GS-5R	5 ft. Rail			
GS-4R	4 ft. Rail			
GS-3R	3 ft. Rail			
GS-2R	2 ft. Rail			
Nominal rail lan	ath dimonoion io			

www.guardsmith.com

Download a worksheet from our website and our staff will assist you in the

<b>W</b>		RDRA	L	0			fre	iah	t chi	uote" arge 146-0	' with 0988	
$\mathbf{n}$	WORKSHEET					AIL CO	ONFIG	URA	rions	B (plea	ise chi	ick)
Contact Name_ Company Address				_				4	l" high	Rail (S	3)	
Phone					1	11-	-	1 0	" Ngh	1, 15" 6	o top of	rail
Fax						1	1					
Email Zip Code of De						1			Lin-O Brack	iut ats (U	. 🗆	
feet. We will rea the layout, please	Out bracket. I pond within on a call 1-800-86	e business	day with	job and	freight	pricing	; Sho	ald you	need	i assiata	ance wi	h
feet. We will response to the layout, please	cond within on	e business	day with	job and	freight	pricing	, Sho	ild you	need	assisfa	ance wi	h
feet. We will read the layout, please	cond within on	e business	day with	job and	freight	pricing	, Sho	id you	i need		ine sone	b
feet. We will read the layout, please	cond within on	e business	day with	job and	freight	pricing	, Sho	id you	need		ance wi	6
feet. We will read	cond within on	e business	day with	job and	freight	pricing	; Sho	id you	need		ance wi	ĥ
feet. We will reap the layout, please	cond within on	e business	day with	job and	freight	pricing	, Sho	ild you	need		ance wi	6
feet. We will reap the layout, please	cond within on	e business	day with	job and	freight	pricing	, Sho	ild yes	need			<b>b</b>
feet. We will reached by the layout, please	cond within on	e business	day with	job and	freight	pricing	, Sho	ild you	a need			<b>b</b>
feet. We will reached by the layout, please	cond within on	e business		job and	freight	pricing	, Sho	iki you	need			
feet. We will resp the layout, please the layout, p	cond within on	e business		job and		pricing	; Shou	iki yes	a need			<b>b</b>

OFFSET BASEPLATE

CENTERED BASEPLATE

CORNER OFFSET BASEPLATE

Nominal rail length dimension is from center of post to center of post.

#### AVAILABLE SIZES AND CONFIGURATIONS OF GUARDSMITH® POSTS

Model #	Size/Description	
GS-SRP	5" x 5" Single Post,	1
	18" high, 17" rail height	0
GS-DRP	5″ x 5″ Double Post, 44″ high, 42″ rail height	
GS-LOB	Lift out brackets (Pair)	•

rails and posts have a safety yellow powder coat finish.



©2021 Herwin Safety, Inc. All rights reserved. Specifications subject to change.

## **EXTERIORGUARD® Outdoor Industrial Guardrail**



**EXTERIORGUARD®** industrial guardrail is designed to protect exterior walls of buildings, walkways, electrical equipment, valving, storage tanks and loading docks in an outdoor environment.

**EXTERIORGUARD®** system provides a highly visible yellow safety barrier as well as a physical barrier.

**EXTERIORGUARD**<sup>®</sup> includes external, galvanized mounting fasteners that pass completely through the 5"x5" post and


rail bracket to ensure maximum structural strength and integrity.

**EXTERIORGUARD**<sup>®</sup> is rated at 10,000 lb. at a 4 mph breakthrough when the included galvanized floor anchors are installed at the proper concrete depth.

**EXTERIORGUARD**<sup>®</sup> has a special powder coating that has successfully passed rigorous salt spray testing to ensure a corrosion resistant product.

#### AVAILABLE EXTERIORGUARD® POST

Size/Description 5" x 5" Double Post,



CENTERED BASEPLATE

EXTERIORGUARD® OUTDOOR GUARDRAIL				
<u>Model #</u>	<u>Size</u>			
EG-8R	8 ft. Rail			
EG-7R	7 ft. Rail			
EG-6R	6 ft. Rail			
EG-5R	5 ft. Rail			
EG-4R	4 ft. Rail			
EG-3R	3 ft. Rail			
EG-2R	2 ft. Rail			

AVAILABLE SIZES OF

**EXTERIORGUARD®** 

HERWIN

Nominal rail length dimension is from center of post to center of post.

EG-DRPE

Model #

44" high, 42" rail height

All rails and posts have a safety yellow powder coat finish.



www.exteriorguard.com

uses a high tech safety yellow powder coating for each rail and post. This coating has been successfully tested in a 2000 hour salt spray test conforming to ASTM B117.

*Exteriorguard*®

Download a worksheet from our website and our staff will assist you in the layout of your application.



©2021 Herwin Safety, Inc. All rights reserved. Specifications subject to change